

Ministry of Education and Science of Ukraine
**ODESSA NATIONAL ACADEMY OF
FOOD TECHNOLOGIES**

International Competition of
Student Scientific Works

**BLACK SEA
SCIENCE 2021**
PROCEEDINGS



ODESSA, ONAFT 2021

Ministry of Education and Science of Ukraine
Odessa National Academy of Food Technologies

International Competition of Student Scientific Works

BLACK SEA SCIENCE 2021

Proceedings

Odessa, ONAFT 2021

Recommended for print by the Academic Council of
Odessa National Academy of Food Technologies
on April 6, 2021, Protocol No. 13

Editorial board:

Prof. B. Iegorov, D.Sc., Professor, Rector of the Odessa National Academy of Food Technologies, Editor-in-chief

Prof. M. Mardar, D.Sc., Professor, Vice-Rector for Scientific and Pedagogical Work and International Relations, Editor-in-chief

Dr. I. Solonytska, Ph.D., Assoc. Professor, Director of the M.V. Lomonosov Technological Institute of Food Industry, Head of the jury of «Food Science and Technologies»

Dr. Yu. Melnyk, D.Sc., Assoc. Professor, Director of the G.E. Weinstein Institute of Applied Economics and Management, Head of the jury of «Economics and Administration»

Dr. S. Kotlyk, Ph.D., Assoc. Professor, Director of the P.M. Platonov Educational-Scientific Institute of Computer Systems and Technologies “Industry 4.0”, Head of the jury of «Information Technologies, Automation and Robotics»

Prof. B. Kosoy, D.Sc., Professor, Director of the V.S. Martynovsky Institute of Refrigeration, Cryotechnology and Ecoenergetics, Head of the jury of «Power Engineering and Energy Efficiency»

Prof. G. Krusir, D.Sc., Professor, Head of the Department of Ecology and Environmental Protection Technologies, Head of the jury of «Ecology and Environmental Protection»

Dr. V. Kozhevnikova, Ph.D., Assoc. Professor, of the Department of Hotel and Catering Business, ONAFT, Technical Editor

Black Sea Science 2021: Proceedings of the International Competition of Student Scientific Works / Odessa National Academy of Food Technologies; B. Iegorov, M. Mardar (editors-in-chief.) [*et al.*]. – Odessa: ONAFT, 2021. – 731 p.

Proceedings of International Competition of Student Scientific Works «Black Sea Science 2021» contain the works of winners of the competition.

The author of the work is responsible for the accuracy of the information.

Organizing committee:

Prof. Bogdan Iegorov, D.Sc., Rector of Odessa National Academy of Food Technologies, Head of the Committee

Prof. Maryna Mardar, D.Sc., Vice-Rector for Scientific and Pedagogical Work and International Relations of Odessa National Academy of Food Technologies, Deputy Head of the Committee

Prof. Stefan Dragoev, D.Sc., Vice-Rector for Scientific Work and Business Partnerships of University of Food Technologies (Bulgaria)

Prof. Baurzhan Nurakhmetov, D.Sc., First Vice-Rector of Almaty Technological University (Kazakhstan)

Prof. Mircea Bernic, Dr. habil., Vice-Rector for Scientific Work of Technical University of Moldova (Moldova)

Prof. Jacek Wrobel, Dr. habil., Rector of West Pomeranian University of Technology (Poland)

Prof. Michael Zinigrad, D.Sc., Rector of Ariel University (Israel)

Dr. Mei Lehe, Ph.D., Vice-President of Ningbo Institute of Technology, Zhejiang University (China)

Prof. Plamen Kangalov, Ph.D., Vice-Rector for Academic Affairs of “Angel Kanchev” University of Ruse (Bulgaria)

Dr. Alexander Sychev, Ph.D., Assoc. Professor of Sukhoi State Technical University of Gomel (Belarus)

Dr. Hanna Lilishentseva, Ph.D., Assoc. Professor, Head of the Department of Merchandise of Foodstuff of Belarus State Economic University (Belarus)

Prof. Heinz Leuenberger, Ph.D., Professor of the Institute of Ecopreneurship of University of Applied Sciences and Arts (Switzerland)

Prof. Edward Pospiech, Dr. habil., Professor of the Institute of Meat Technology of Poznan University of Life Sciences (Poland)

Prof. Lali Elanidze, Ph.D., Professor of the Faculty of Agrarian Sciences of Iakob Gogebashvili Telavi State University (Georgia)

Dr. V. Kozhevnikova, Ph.D., Senior Lecturer of the Department of Hotel and Catering Business of Odessa National Academy of Food Technologies, Secretary of the Committee

3. INFORMATION TECHNOLOGIES, AUTOMATION AND ROBOTICS

MEASURING SYSTEM TO MONITOR STRAIN OF BRIDGE, OVERPASS COMPONENTS AND BRIDGE CLEARANCE

Author: Okushko Oleksandr

Advisor: Levterov Andrii

Kharkiv National Automobile and Highway University (Ukraine)

Abstract. *On the basis of the application of optic methods and systems to measure bridge structure strains and the principle of laser beam sweep in horizontal and vertical planes, this paper describes the devices, which are designed by the authors of the article, to monitor bridge structure strains and bridge clearance that can be used in the ASSM.*

Key words: *strain monitoring of bridge structure, bridge clearance, optical scanning system, laser, collimator, photodetector, step motor.*

Bridge structures are usually complex dynamic systems. Across the world, bridge span lengths are increasing and flexible structures are being widely used, making these structures even more sensitive to dynamic loads.

In order to monitor and forecast the condition of the bridge structure, in order to give early warning of trends in the geometric parameters of the structure, it is necessary to carry out periodic surveys of the structure of the bridge or the track.

Analysis of publications

The main task of monitoring the deformation of bridge structures is to determine the tendency of the geometric parameters of the structures to change by means of periodic monitoring of the deformations of the structural units of the structure and to prevent the occurrence of unacceptable deformations in the components constructions [1,2,3].

Traditionally, periodic monitoring of the condition of the structure is carried out using various geodetic means [4]:

- optical high-precision lowers (definition of vertical displacement)
- Electronic TPS tachymeters (definition of horizontal and vertical displacement)
- GPS satellite receivers (horizontal and vertical displacement)
- Rangefinder (Horizontal Displacement Determination) Sensors for Inclination, Accelerometers, Tensometers, Alkalemers and Other Data Collection Tools.

However, the Automated Deformation Monitoring Systems (ASSM) of a bridge structure need to employ other methods, instrumentation and deformation measurement systems that allow for 24 hours a day and 365 days a year to carry out monitoring with the specified discretionary value [2].

Modern Assms are in demand and are widely introduced and used both at home and abroad.

The use of ASSM of a bridge structure makes it possible to rapidly monitor the condition of the bridge structure, the displacement and the bends caused by the effects of external natural and climatic influences and the heavy vehicle load, and in cases of high dynamic load of overpasses by aircraft (Picture 1) [5] and by rail (Picture 2) [6.7].



Picture. 1. Dynamic load of overpasses by aircraft



Picture. 2. Dynamic load of rail tracks

It should be noted that the displacement and bends of the bridge structure also affect the sub-mural dimension. According to DBN B.2.3.-22:2009 (Appendix B) of Ukraine, the height H of the gauge of the overpass above the surface of the pavement on the roads of the I - III categories and in cities are taken equal to 5 m, and on roads of the IV and V categories - 4.5 m.

But there are sections of roads for which height limits are imposed. The sign «Height limit» [8] is displayed on these sections in order to limit the movement of overall transport. If the height of the vehicle (both with and without load) exceeds the marked border, passage on this section of the road is categorically prohibited (Picture. 3).



Picture. 3. Overall traffic restrictions

If the damage to the side-by-side vehicle (Picture. 4) results in possible injury to the driver, damage to the heavy-duty bridge structure (overpass) (Picture 2) could lead to a fatal disaster with many casualties.



Picture 4. Failure of the driver to comply with the sign «Height limitation»

Therefore, it is necessary to install at a certain distance from the bridge the information structure of the beam or frame system with a corresponding position equal to the underside of the bridge with the corresponding signs (Picture. 5). Even if, in this case, if the driver does not comply with the sign «Height limitation» the overall vehicle and the information structure will be damaged, however this will make it possible to avoid damage to the bridge structure.



Picture 5. Information construction of the beam and frame system


Devices based on deploying optical systems have been proposed for the deformation monitor of the bridge structure and for the determination of the under-pillar dimension in [9]. However, as noted in the article, when the laser beam deployment unit and the stepper engine are located on the side of the road on one side of the bridge structure, the position of the photoreceivers on the bridge bulkhead will be very uneven. That is, on the bypass beam of the bridge structure on the side of which the laser beam is deployed, if the distance between the photodetectors is centimetres, on the opposite side of the bypass beam up to several meters. This, in turn, will lead to a significant error in calculating the deformation of the bypass beam and the underside of the portion where the distance between the photodetectors is measured by metres. Therefore, the proposed step motor, the laser beam deployment unit and the photodetector are located in the middle of the road under the bridge structure on the information structure of the beam or frame system (Picture. 5) at a certain distance from the bridge structure. Thus, the information structures of the beam or frame system, in this case, have a dual function: the installation of signs informing drivers of the height of the under-pillar, thereby protecting the bridge structure against damage by

road traffic, and the location of the equipment for measuring the deformation of the bridge structure and the underside clearance.


Consider in more detail the proposed design solution and the operation of the device for measuring the deformation of the bridge structure and the under-bridge dimension.

Photodetectors $3_1, 3_2, \dots, 3_i, \dots, 3_n$, which are distributed and fastened throughout the length of the span beam of the bridge structure and photoreceivers $4_1, 4_2, \dots, 4_i, \dots, 4_n$, which is mounted on a support on the structure of the beam or frame system 5 above the middle of the roadway at a certain distance from the bridge, each of which is in the same vertical plane with corresponding $3_1, 3_2, \dots, 3_i, \dots, 3_n$ photodetectors fastened to the span beam of the bridge structure (Picture 6).

Step engine 6, which is programmed by block 7 of step engine control, installed on the structure of the beam or frame system 5 above the middle of the roadway at a certain distance from the bridge and, accordingly, at a certain distance from the photodetectors $4_1, 4_2, \dots, 4_i, \dots, 4_n$, wherein a platform 8 is fixed to the shaft of the stepper engine, on which a light source 9 in the form of an IR-range laser, a collimator 10 and a unit 11 of a laser beam diffuser are mounted in series. To select the points of installation of the photodetectors $3_1, 3_2, \dots, 3_i, \dots, 3_n$ along the entire length of the spanning beam of the bridge structure and measurement of the submersible dimension l_i (bottom of photoreceivers $3_1, 3_2, \dots, 3_i, \dots, 3_n$ on the passing beam 1 of the bridge and points $4_1', 4_2', \dots, 4_i', \dots, 4_{n-1}', 4_n'$ on the road 2 (Picture 6) are used, for example, a tachymeter. Points of installation of photodetectors $3_1, 3_2, \dots, 3_i, \dots, 3_n$ and $4_1, 4_2, \dots, 4_i, \dots, 4_n$, selected according to the angle of rotation (step) of the shaft of the stepper engine (e.g., $\gamma = 0.9^\circ$ or 1.8°), which is installed at the position of the tachymeter on the beam or frame structure above the middle of the roadway. Cameras $4_1, 4_2, \dots, 4_i, \dots, 4_n$, is mounted on the support structure of the beam or frame system above the middle of the roadway in such a way that points $4_1', 4_2', \dots, 4_i', \dots, 4_{n-1}', 4_n'$ were their sequel 13 on Road 2 (Picture 6, 7).

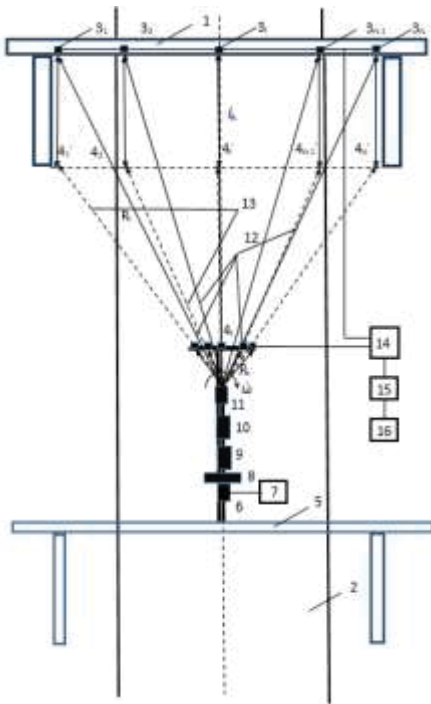

Picture 6. General appearance of the device without deformation of the bridge bulkhead

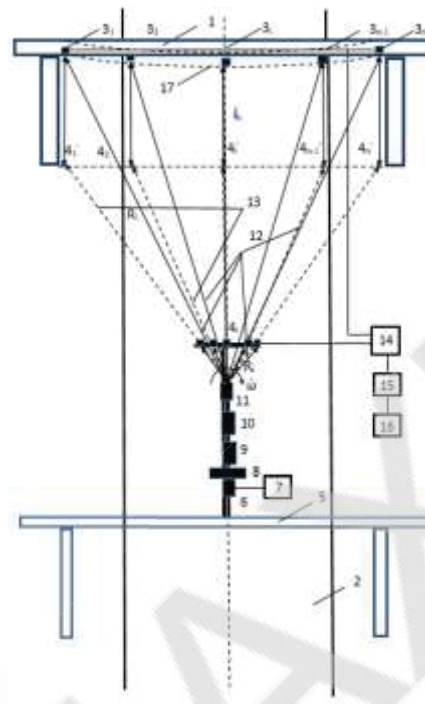


Picture 7. General view of the device with overflow beam deformation

The device uses a laser 9 (laser diode) with continuous radiation of an infrared ray (IR) range of a certain wavelength. In series with laser 9, an optical collimator 10 is arranged, consisting of a lens, in the focal plane of which the output of a laser beam 12 is located. The optical collimator 10 ensures the parallel of the laser beam 12 and therefore, due to the practically zero divergence, all the laser beam energy will be concentrated on the sensitive surface of each photodetector made of a certain material. A laser beam that passes through without major obstacles. Each photodetector 3₁, 3₂, ..., 3_i, ..., 3_n and 4₁, 4₂, ..., 4_i, ..., 4_n, contains a photodiode preceded by a sensitive surface or an optical filter which passes a beam of only a certain wavelength of a laser. All elements of the photodetector are placed in a sealed housing. For example, the unit for scanning 11 is in the form of an engine on which the shaft has a mirror at an angle of 45° to a laser beam, or a scanning optical wedge, by means of which the laser beam is unfolded in a vertical plane.

The laser 9, the optical collimator 10 and the unit for deploying the 11 laser beam are placed on platform 8, which is mounted on the shaft of the stepper engine 6, which, according to the program of block 7 of the control of the stepper engine, rotates the shaft of the stepper engine and, correspondingly, the platform is one step (the angle is equal to γ). After some time, from block 7 of step engine control, a command enters the step engine, resulting in its shaft being rotated to a different angle γ , etc. until the pitch engine angle from the zero point reaches the value $\alpha = n * \gamma$, installed by a tacheometer and programmed in block 7 of step engine control. The step engine shaft is then returned to the reference (zero) point and the process is repeated.

Thus, the optical signal 12, unfolding from the unit of the deployment 11, successively runs on the sensitive surface 3₁, 3₂, ..., 3_i, ..., 3_n and 4₁, 4₂, ..., 4_i, ..., 4_n, photoreceivers of certain length h (Picture 6, 7). Electrical signal from photodiodes of

each of the photodetectors $3_1, 3_2, \dots, 3_i, \dots, 3_n$ and $4_1, 4_2, \dots, 4_i, \dots, 4_n$, the amplifier of the electrical signal of the corresponding photodetector which, after amplification, enters the switching unit 14 (Picture 6 7). The duration of the electrical pulse from the output of the photoreceiver will be determined by the rate of passage of the laser beam on the sensitive surface of the photoreceiver, which in turn, will be determined by the angular speed ω of the engine of the deployment node and the distance R of the deployment node to the corresponding photoreceiver (Picture 6, 7). Therefore the duration of impulses with $3_1, 3_2, \dots, 3_i, \dots, 3_n$ and $4_1, 4_2, \dots, 4_i, \dots, 4_n$, the photodetectors will be different and will increase as the photodetector approaches the deployment node (Picture 8)

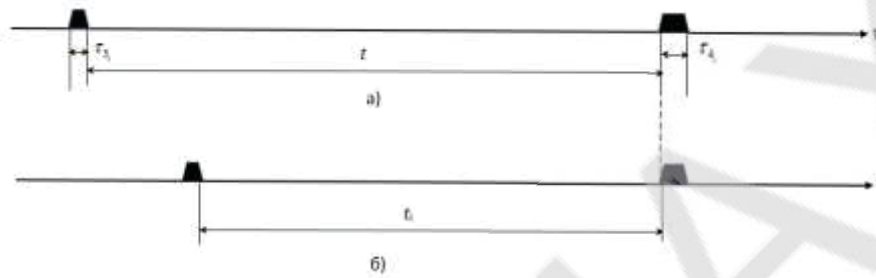

Picture 8. Time diagrams of operation of the device without deformation of the bridge span (a) and after deformation (b).

$$\tau_{3_i} = \frac{h}{\omega R_i}, \quad (1)$$

where $\omega = 2 * \pi * f$ is the rotational speed of the engine;

R_i is the distance between the laser beam scanning unit and the photodetector 3_i , where $i = 1, 2, \dots, n$.

Then for photoreceiver 4_i the pulse duration will be, respectively,

$$\tau_{4_i} = \frac{h}{\omega R_j}, \quad (2)$$

where $i = 1, 2, \dots, n$; $j = 1, 2, \dots, n$.

The duration t of the laser beam passing from photoreceiver 3_i to photoreceiver 4_i will correspond to the length l_i of the submersible dimension in the absence of deformation of the bridge span beam. It should be noted that the time t is taken from the rear of the pulse of photoreceiver 3_i to the front of the pulse of photoreceiver 4_i (Picture 8, a).

If the structure of the bridge is deformed at 17 (dotted lines in picture 7), the sub-bridge gauge will change, respectively, to l_i' (Picture 7), corresponding to the time t_i of passage of the laser beam from photodetector 3_i to photoreceiver 4_i (Picture 8, b) The pulse length shall be the same as for a structure without deformation (Picture 8, a).

After receiving pulses from photodetectors $3_1, 3_2, \dots, 3_i, \dots, 3_n$ and $4_1, 4_2, \dots, 4_i, \dots, 4_n$ via unit 14 of switching to unit 15 of calculation, the latter performs calculations first t and t_i , and then sub-measure by expression

$$\frac{t}{t_i} = \frac{l_i}{l_i'}, \quad (3)$$

where $i = 1, 2, \dots, n$.

$$l_i' = \frac{l_i \cdot t_i}{t} . \quad (4)$$

From where, the deformation value of the bridge span will be

$$\Delta l = l_i - l_i' , \quad (5)$$

After the transformation and calculation, the information about the size of the submersible dimension and the amount of deformation of the span beam of the bridge is transmitted from the 15 calculation unit to the recorder 16 (Picture 6, 7).

The developed device has been tested in laboratory conditions, has demonstrated a high performance and a sufficient accuracy (up to 1 mm) of measuring the under-pillar dimension and deformation of the structure of the bridge structures.

The device can be used in an automated system for monitoring deformations and bridge dimensions (ASDM), which makes it possible to rapidly monitor the state, displacement and deflection thereof resulting from the effects of external natural and climatic influences, as well as a continuous traffic flow on road bridges, as well as aircraft and trains on the corresponding overpasses.

Lyteratura:

1. Automated Deformation Monitoring is an innovative technology for the safety of the mining, oil and gas industries. 2010. URL: <http://ww.g.fk-leica.ru/pyblikacii/avtomatizi-rovannyi/>
2. Hiller B.O., Geodetic Monitoring of Bridges «G.F.K.» in Moscow, Moscow, St. Petersburg, St. Petersburg, Professor Shultz R.V., Adamenko A.V., Kyiv
3. Geodetic monitoring [Electronic Resource] / Efficient technologies. - Access mode: <http://eftgroup.ru/geodesy-browse/> (date of referral: 26.02.2018).
4. Deformation monitoring of bridges. Meaning and Challenges. 2015. URL: https://www.icentregfk.ru/article/a_def_mon_bridges.htm.
5. URL: <https://www.google.com/search?q=%3A%20https+%3A%2F%2Fdiman7777.livejournal.com>.
6. URL: <https://korrespondent.net/ukraine/politics/3393870-v-zonato-vosstanovyly-shest-zhd-mostov>
7. URL: <https://wikimapia.org/11625030/ru/>
8. URL: <http://autoass.ru/dorozhnye-znaki/3-13-ogranichenie-vysoty.html>
9. Leverov A.I., Labenko D.P. Measuring system for monitoring deformations of structural elements of bridge structures and sub-bridge gauge / KhNAHU Messenger. - 86. T.1. 2019 - P.20-28.

COVID-19 IMPACT ON WORLD GLOBALIZATION AND NATIONAL LOCALIZATION WITHIN SUSTAINABLE DEVELOPMENT Author: Kirill Shcherbakov Advisor: Oleh Sokil Dmytro Motorny Tavria State Agrotechnological University (Ukraine).....	284
SYSTEM ANALYSIS OF THE MANAGEMENT OF THE COMPETITIVENESS OF AGRICULTURAL ENTERPRISES' PRODUCTS Authors: Darina Nipatruk, Ekaterina Narkevich Advisor: Larisa Narkevich Belarusian-Russian University (Belarus).....	299
A COMPARATIVE APPROACH ON HUMAN CAPITAL FORMATION IN THE BALTIC COUNTRIES AND COUNTRIES FROM THE EASTERN PARTNERSHIP. THE DETERMINANTS OF HUMAN CAPITAL FORMATION IN THE REPUBLIC OF MOLDOVA. Author: Ruslan Mahmadbecov Advisor: Rodica Crudu Academy of Economic Studies of Moldova (Moldova).....	332
FINTECH: TRENDS AND PROSPECT OF DEVELOPMENT IN THE TRANSITION TO A TOUCHLESS ECONOMY Author: Pavlo Nahorny Advisor: Kateryna Hnedina Chernihiv Polytechnic National University (Ukraine).....	347
3. INFORMATION TECHNOLOGIES, AUTOMATION AND ROBOTICS 360	
MEASURING SYSTEM TO MONITOR STRAIN OF BRIDGE, OVERPASS COMPONENTS AND BRIDGE CLEARANCE Author: Okushko Oleksandr Advisor: Levterov Andrii Kharkiv National Automobile and Highway University (Ukraine).....	361
CONSTRUCTION OF CONTROL SYSTEMS OF FLOW PARAMETRES OF THE SMART CONVEYOR USING A NEURAL NETWORK Author: Anastasiya Sytnikova Advisor: Oleh Pihnastyi National Technical University «Kharkiv Polytechnic Institute» (Ukraine).....	368
PRINCIPLES OF CREATING A DECISION-MAKING SYSTEM FOR A RADIOLOGIST-MAMMOLOGIST Author: Aleksandra Efimova Advisor: Aliaxey Kayeshko Belarusian State University of Informatics and Radioelectronics (Belarus).....	383