

Ministry of Education and Science of Ukraine
**ODESSA NATIONAL ACADEMY OF
FOOD TECHNOLOGIES**

International Competition of
Student Scientific Works

**BLACK SEA
SCIENCE 2021
PROCEEDINGS**



ODESSA, ONAFT 2021

Ministry of Education and Science of Ukraine
Odessa National Academy of Food Technologies

International Competition of Student Scientific Works

BLACK SEA SCIENCE 2021

Proceedings

Odessa, ONAFT 2021

Recommended for print by the Academic Council of
Odessa National Academy of Food Technologies
on April 6, 2021, Protocol No. 13

Editorial board:

Prof. B. Iegorov, D.Sc., Professor, Rector of the Odessa National Academy of Food Technologies, Editor-in-chief

Prof. M. Mardar, D.Sc., Professor, Vice-Rector for Scientific and Pedagogical Work and International Relations, Editor-in-chief

Dr. I. Solonytska, Ph.D., Assoc. Professor, Director of the M.V. Lomonosov Technological Institute of Food Industry, Head of the jury of «Food Science and Technologies»

Dr. Yu. Melnyk, D.Sc., Assoc. Professor, Director of the G.E. Weinstein Institute of Applied Economics and Management, Head of the jury of «Economics and Administration»

Dr. S. Kotlyk, Ph.D., Assoc. Professor, Director of the P.M. Platonov Educational-Scientific Institute of Computer Systems and Technologies “Industry 4.0”, Head of the jury of «Information Technologies, Automation and Robotics»

Prof. B. Kosoy, D.Sc., Professor, Director of the V.S. Martynovsky Institute of Refrigeration, Cryotechnology and Ecoenergetics, Head of the jury of «Power Engineering and Energy Efficiency»

Prof. G. Krusir, D.Sc., Professor, Head of the Department of Ecology and Environmental Protection Technologies, Head of the jury of «Ecology and Environmental Protection»

Dr. V. Kozhevnikova, Ph.D., Assoc. Professor, of the Department of Hotel and Catering Business, ONAFT, Technical Editor

Black Sea Science 2021: Proceedings of the International Competition of Student Scientific Works / Odessa National Academy of Food Technologies; B. Iegorov, M. Mardar (editors-in-chief.) [*et al.*]. – Odessa: ONAFT, 2021. – 731 p.

Proceedings of International Competition of Student Scientific Works «Black Sea Science 2021» contain the works of winners of the competition.

The author of the work is responsible for the accuracy of the information.

Organizing committee:

Prof. Bogdan Iegorov, D.Sc., Rector of Odessa National Academy of Food Technologies, Head of the Committee

Prof. Maryna Mardar, D.Sc., Vice-Rector for Scientific and Pedagogical Work and International Relations of Odessa National Academy of Food Technologies, Deputy Head of the Committee

Prof. Stefan Dragoev, D.Sc., Vice-Rector for Scientific Work and Business Partnerships of University of Food Technologies (Bulgaria)

Prof. Baurzhan Nurakhmetov, D.Sc., First Vice-Rector of Almaty Technological University (Kazakhstan)

Prof. Mircea Bernic, Dr. habil., Vice-Rector for Scientific Work of Technical University of Moldova (Moldova)

Prof. Jacek Wrobel, Dr. habil., Rector of West Pomeranian University of Technology (Poland)

Prof. Michael Zinigrad, D.Sc., Rector of Ariel University (Israel)

Dr. Mei Lehe, Ph.D., Vice-President of Ningbo Institute of Technology, Zhejiang University (China)

Prof. Plamen Kangalov, Ph.D., Vice-Rector for Academic Affairs of “Angel Kanchev” University of Ruse (Bulgaria)

Dr. Alexander Sychev, Ph.D., Assoc. Professor of Sukhoi State Technical University of Gomel (Belarus)

Dr. Hanna Lilishentseva, Ph.D., Assoc. Professor, Head of the Department of Merchandise of Foodstuff of Belarus State Economic University (Belarus)

Prof. Heinz Leuenberger, Ph.D., Professor of the Institute of Ecopreneurship of University of Applied Sciences and Arts (Switzerland)

Prof. Edward Pospiech, Dr. habil., Professor of the Institute of Meat Technology of Poznan University of Life Sciences (Poland)

Prof. Lali Elanidze, Ph.D., Professor of the Faculty of Agrarian Sciences of Iakob Gogebashvili Telavi State University (Georgia)

Dr. V. Kozhevnikova, Ph.D., Senior Lecturer of the Department of Hotel and Catering Business of Odessa National Academy of Food Technologies, Secretary of the Committee

5. ECOLOGY AND ENVIRONMENTAL PROTECTION

EFFICIENCY FROM WETLANDS AND AERATED LAGOONS FOR WASTEWATER TREATMENT

Authors: Anastasia Lahotska¹, Karolina Jozwiakowska²

Advisor: Myroslav Malovanyy

¹Lviv Polytechnic National University (Ukraine)

²H. Kołłątaj University of Agriculture in Kraków (Poland)

Abstract. *Purpose of the work is to analyze existing wetland systems, biotechnologies on using hydrobionts and aerated lagoons in wastewater treatment systems. Task of the work is to elaborate experimental wastewater plant units based on its function characteristics for suggesting improved models. Relevancy of the work is the increasing environmental pollution caused by wastewaters and urgent need for improved implemented wastewater treatment systems. Study methods used in the work included general scientific methods as system analysis, induction, deduction. Obtained results of experimental studied concluded the following: the efficiency of different pollutants removal is higher in hybrid constructed wetlands than in one-stage systems; hybrid constructed wetlands not only resolve ecological problems about wastewater management but can also provide landscape and educational profits because of their interesting shapes and innovative methods used; long term research on the operation of constructed wetland systems in Poland indicate that these systems can be used with great success on rural areas, especially in protected areas and valuable landscapes in Ukraine; cyanobacteria biomass, released from cultural medium, can be used for production of small tonnage valuable products with unique properties, large tonnage biomass of natural origin can be used for fuel production (biomethane, bioethanol, biodiesel); suggested two-stage purification scheme of landfill infiltrates enables to purify infiltrates effectively with primary purification under conditions of aerobic lagoon on the territory of landfill, transporting of infiltrate with the help of pipeline «landfill – municipal PCF», dissolving it with municipal sewerage effluents and pretreatment on municipal PCF.*

Keywords: *wetlands, aerated lagoons, wastewater treatment, biofuel production, cyanobacteria, hydrobionts, biomass.*

I. PERSPECTIVE OF USING WETLAND SYSTEM IN POLAND

Recent solutions for wastewater treatment in Poland are household wastewater treatment plants that in Poland can be defined as objects that support up to 50 people and their maximum capacity is $5 \text{ m}^3 \cdot \text{d}^{-1}$ [Water Law 2017, Poland]. There can be enumerated many different types of them and the most important ones are the facilities with drainage pipes, with active sludge, with biofilter, hybrid systems (active sludge+biofilter) and constructed wetlands [Jóźwiakowski et al. 2012]. The first one-stage constructed wetland in Poland was built during 1994-1996 and the scheme of such a facility can be seen on the Appendix 1. Constructed wetland wastewater treatment method involves the use of sorption processes of pollutants, chemical redox reactions and biological activity of selected plants that inhabit the marsh ecosystems. Wastewater treatment using wetlands can take place in natural or artificial conditions, then called "wetland" and

"constructed wetland" respectively. Such wastewater treatment is widely applied in many countries (Austria, Czech Republic, Denmark, Germany, Italy, Poland, Portugal, Korea, Japan, Australia etc.) Pollution removal in constructed wetland systems occurs due to the functioning of a biofilm which is formed during the flow of wastewater through the bed. Plants play an auxiliary role in the sewage treatment process. In the rhizosphere (around plant roots) oxygen is produced, while other parts of the bed are anaerobic zone and they are poorly oxygenated. Plants in the constructed wetland systems can be assessed as elements which enable constant oxygen supply from the atmosphere to the bed. Due to the aerenchyma diffusion of oxygen from the atmosphere through the leaves and reed stems allows oxygen to flow into the root zone and then into the ground bed ecosystem, where oxygen can be additionally transferred through molecular diffusion resulting from the chaotic movement of gas particles [Brix 1993]. Plants in constructed wetland systems can have the following functions: stabilizing the surface of beds and protecting them from erosive wind, excellent habitat for fauna (especially birds), excellent thermal insulation, protecting the filter material from freezing in winter, excellent conditions for the development of heterotrophic microorganisms responsible for the organic matter rotting.

In recent years there has been observed a tendency to build hybrid CWs consisting of two or three beds with vertical and horizontal wastewater flow [Gajewska and Obarska-Pempkowiak, 2009; Dębska et al., 2015; Józwiakowski et al., 2016]. According to many authors, hybrid CWs provide better conditions for biological wastewater treatment [Gajewska et al., 2004; Gajewska and Obarska-Pempkowiak, 2009; Vymazal, 2005; Masi and Martinuzzi, 2007]. There can be different types of hybrid CWs, we can combine not only different plant species but also different types of sewage flow can be implemented – with vertical and horizontal flow (Appendix 2).

So far there has been built a lot of constructed wetlands in Poland. Many researchers test different equipment and combinations of plant species in order to obtain the best efficiency of domestic wastewater treatment. One of such scientific groups which concentrate on CW systems is the Department of Environmental Engineering and Geodesy from the University of Life Sciences in Lublin. The scientists design and make studies especially on the objects located in south-eastern part of Poland, in Lublin voivodeship. The most common ones are recently the hybrid CWs located in the Roztocze National Park and in the Polesie National Park. A very interesting aspect that should be mentioned is the unique shape of these CWs. For instance in Kosobudy (Appendix 3) the ground and plant beds are designed in the shape of a christmas tree, while in Stare Załucze (Appendix 4) we can observe a turtle shape wastewater treatment plant. The application of constructed wetlands in the areas of nature protection proves that this is a great solution of wastewater treatment which enables not only reliable operation and environmental care of endangered places but can also provide landscape and educational profits because of their interesting shapes and innovative methods used. A multicriterial analysis which takes the above-mentioned criteria into account shows that the use of CWs is consistent with the idea of sustainable development [Józwiakowski et al. 2015]. These systems fulfil all of the sustainability criteria, in particular the ecological criterion, as they ensure high efficiency of wastewater treatment with relatively small energy demand [Józwiakowski et al. 2019].

It has been observed by many researchers that constructed wetland enable not only high efficiency of wastewater treatment but also a reliable operation for many years. According to many authors CW systems can be a great solution for domestic wastewater treatment as they enable the elimination of many different pollutants such as: TSS, BOD₅, COD, total nitrogen, total phosphorus, heavy metals and pathogens.

The basic element of every constructed wetland system should be an initial septic tank which ensures the elimination of the biggest pollutants during sedimentation, flotation and fermentation. Then sewage after initial purification can be easily treated while biological purification processes occurring in the ground and plant beds. About 25 years of research on the CWs in south-eastern Poland has shown that the discussed systems provide especially high efficiency (over 80%) of biological pollutants removal, which has been expressed by the decrease of BOD₅, COD and TSS values [Józwiakowski et al. 2019]. The changes in the state of wastewater treated in the CW system are easily visible which is presented in the Appendix 6. Long term observations have shown that the efficiency of different pollutants removal in the hybrid constructed wetlands is bigger than in the case of one stage CW systems which can be seen in the Appendix 7. For this reason the discussed systems are suggested to be implemented not only on rural areas with dispersed housing, but especially on the protected areas, where the demands of pollutants removal are extremely tight.

On the basis of the polish experiences it can be stated that the efficiency of different pollutants removal is higher in hybrid constructed wetlands than in one-stage systems. Hybrid constructed wetlands not only resolve ecological problems about wastewater management but can also provide landscape and educational profits because of their interesting shapes and innovative methods used. Long term research on the operation of constructed wetland systems in Poland indicate that these systems can be used with great success on rural areas, especially in protected areas and valuable landscapes in Ukraine.

II. PERSPECTIVES FROM USING HYDROBIONTS AND AERATED LAGOONS

Very promising and perspective biotechnology resource for wastewater treatment are such hydrobionts as cyanobacteria. Cyanobacteria play significant role for balanced development of hydro-ecosystems, since they are the main, and sometimes the only, producers of primary organic substance in them. It is estimated today, that from 20 to 30 % of oxygen, obtained from photosynthesis in our planet, is owed to cyanobacteria. This is exactly why they played central role in alteration of air content and atmosphere structure. Cyanobacteria fix oxygen not only in soils, but in coral reefs as well as in other marine ecotopes, making nitrogen available to other organisms under conditions of different ecosystems. Cyanobacteria don't need vitamins for existence and development. They can use nitrates or ammonia as source of nitrogen and also phosphorus compounds and microadditives of such elements as ferrum, sulphur, zinc, copper, manganum, cobaltum, molybdenum etc. Most of their species are phototrophs, but some filamentous types can grow in darkness, using some carbohydrates (glucose or saccharose) as source of energy. Optimum conditions for cyanobacteria growth lay in complex of interconnected, mostly abiotic

factors. The method of thickening of the aqueous suspensions of *Microcystis aeruginosa* using the coagulation-flocculation pretreatment was studied using the industrial coagulants and flocculants produced by P.P.H.U. WĘGLO-STAL (Poland). In the investigated suspension of *Microcystis aeruginosa* (without cavitation treatment, or after cavitation treatment), an appropriate reagent composition was added. Content of additives in different samples of suspension are given in Appendix 14. In order to improve the techno-economic indicators of the method researches were done using the very diluted suspensions Appendix 14. The mass contents of PAX-18 and PAX-XL19H coagulants in different suspensions were equal 10 ppm or 1 ppm, and the mass content of flocculant A100 was 10 ppm or 1 ppm, if it used separately, and only 1 ppm if it used in combination with coagulants.

The results of microalgae suspensions thickening by sedimentation with preliminary coagulation and flocculation treatment with the PAX-18 and PAX-XL19H polymer coagulants, as well as the A100 flocculant are shown in Appendix 15. The numbers of the measuring cylinders correspond to the type and concentrations of the additives indicated above in the Appendix 14. Cyanobacteria biomass contains many target products that are valuable for different fields of modern bioeconomics: food, pharmaceutical and perfumery industry. Under natural conditions these bacteria massively grow for centuries as primary source of organic compounds. In our time much effort has been put in field of genetic engineering for modification of phototrophic microorganisms, especially cyanobacteria, – producers of new useful compounds (target products) that aren't synthesized in natural way. Actual direction of modern studies is also environmental biotechnology and bioenergetics that anticipate direct application of cyanobacteria large-tonnage biomass and other massive forms of hydrobionts as raw material for biofuel production (biomethane, bioethanol and biodiesel) and mineralorganic fertilizer. Production of another fuel type – biogas (biomethane) using method of anaerobic digestion of cyanobacteria (biomethanogenesis), that uncontrollably grew during summer period in reservoir water area of Dnieper waterfall. Experiments have shown, that although no universal method for harvesting and concentration of microalgae exists (it is still productive field for studies), for every particular algae species, optimal economic ways and methods can be made. After concentration, in majority of cases it was used a biomass dehydration, resulting increase its maximum term of residence. For microalgae, such ways of dehydration are used as drum, pulverizer, sublimation or solar desiccation. Extraction of lipids and pendent fatty acids from biomass is conducted directly from lyophilization biomass. For extraction can be used such dissolvents as hexane, ethanol or mixture of both hexane and ethanol, which allows to extract up to 98 % purified lipids and fatty acids. Studies have shown, that in case of damage of cellular wall of algae with help of ultrasound procession, extraction of target product increases from 4,8 % to 25,9 %. From obtained feedstock, biodiesel can be produced using traditional technology– repeated esterification of plant oils. Lipid feedstock consists from 90–98 % (weight) triglyceride and small amount of mono- and diglyceride, contains free fatty acids (1–5 %) and small amounts of phospholipids, phosphatides, carotenes, tocopherols, sulphur compounds and remnants of water.

The most popular wastewater technologies in Ukraine are the following: reverse osmosis technology; technology of chemical and biological oxidation; infiltrate knotting technology; technology of biological purification in anaerobic and aerobic medium.

Aerobic methods of biological purification of filtrates have row of undeniable advantages over anaerobic: they are flexible in using, fast include in stationary regime of work, fast accommodate to changeable composition and expanses of filtrates. Aerobic reactors are far more simpler in construction and far more cheaper than anaerobic, they are also much easier automatized and easier in exploitation.

From analysis of existing natural studies it is possible to make conclusion, that purification of infiltrates in aerobic lagoon (or simultaneously connected lagoons) is simply, low-budget and enough efficient method of pretreatment of infiltrates.

Study of the aerobic purification was conducted at plant (Appendix 16).

The plant contained from 5-liter bulb, that with volume of 4 l was filled with infiltrate. Infiltrate for studies was chosen from pound-accumulator of Lviv MSW For aeration the air was supplied to bulb with the help of laboratory compressor. With the help of regulation compressor, set on air flow tube, it was regulated air expanses on aeration and supported constant significance of this expanse throughout the whole experimental time. Experimental work was conducted in two stages.

At first stage (static) was set alteration of COD, concentrations of ammonium nitrogen, pH and concentration of dissolved oxygen under conditions of continuous aeration without allotment of pretreated infiltrate and accordingly without addition into volume `fresh`, untreated infiltrate.

At second stage (dynamic) that was conducted after obtaining maximum possible level of purification under static regime, it was modeled continuous regime of purification, that is planned to be implemented at industrial pollution control facility. Once in 24 hours from bulk it was taken certain amount of infiltrate and was poured same amount of `fresh` unpurified infiltrate. For certain proportion significance of the sample the researches were conducted for obtaining constant concentrations of ammonium nitrogen and COD. After that, the daily volume of purified and `fresh` infiltrate was substituted, that accordingly was collected and poured into aeration plant, and it was studied a process of aerobic purification in dynamic regime for another time significance of infiltrate delay in aeration zone. Once in a day an infiltrate sample from bulk for analysis and sample for addition of infiltrate were taken.

Methodology of tertiary infiltrate treatment research at PCF.

For experiments in static regime for research place a mixture of effluents with active sludge was taken. Infiltrate in quantity of 1 m³ was selected from pound-accumulator №5 in MSW Hrybovyske landfill. In experimental aeration plant was poured mixture of effluents and active sludge and was added calculated quantity for obtaining mixtures, that met the following dissolving criteria: 10; 500; 1000; 1250; 1500. In reactor it was added mixture of effluents with active sludge till obtaining general volume in 1,64 m³. After that samples were taken for chemical experiments and the plant was launched. Every study cycle in static regime lasted 6 hours. After finishing of air supply a sample was taken for conducting chemical experiments.

Experiments in dynamic regime were conducted at the same plant (Appendix 17) The plant contained primary settlers: primary model settler for mixture of effluents with infiltrate and primary model settler for effluents without infiltrate. During 8 daily experiments the mixture from effluents and infiltrate as equally carried to aeration plant 1. Regulations of expanses were carried with the help of circulation pump and valve. Homogeneity of the mixture was obtained with the help of aerator. After 8 hours of mixture supply from effluents with infiltrate it was modeled working process of aerotank during 16 hours without adding infiltrate.

General strategy for two-stage cultivation of landfill infiltrates

Analyzing research data it is recommended principal scheme for implementation of landfill infiltrates pretreatment technology that is illustrated in Appendix 18. According to this scheme, infiltrates are accumulated in pound-accumulator that simultaneously serves as aerobic lagoon.

For this it is equipped with aeration system. Pound-accumulator is being screened with protective display by using well known technologies. In aerobic lagoon biological aerobic oxidation is taking place of organic contaminants and of ammonium nitrogen. Constant inflow is being realized and harvesting of infiltrates under conditions of supplement with necessary period of infiltrate residence in reactor. Infiltrate collection is being done with the help of pump station throughout set pipeline «landfill – municipal PCF» infiltrate is transferred into mixing block PCF where at given proportion it is mixed with municipal effluents and in mixture is directed to tertiary treatment at municipal PCF. For every particular case for technology implementation it is necessary to make balance calculation.


III. REFERENCE

1. Berg M and Sutula M. 2015. Factors affecting the growth of cyanobacteria with special emphasis on the Sacramento-San Joaquin Delta. Southern California Coastal Water Research Project Technical Report 869 August 2015
2. B. Drogg et al., Photo-autotrophic Production of Poly(hydroxyalkanoates) in..., Chem. Biochem. Eng. Q., 29(2) 145–156 (2015)
3. Castenholz, R. W., A Handbook on Habitats, Isolation, and Identification of Bacteria, Section B, Springer, Berlin Heidelberg 1981, pp. 236–246.
4. De Vera, J.-P. P., Möhlmann, D., Leya, T., Photosynthesis activity of frozen cyanobacteria, snow alga and lichens as pre-tests for further on studies with simulation of Mars equatorial latitude temperatures, EPSC Abstracts 4(2009) 355.
5. Miyake, M., Erata, M., Asada, Y., J Ferment Bioeng 82 (1996) 516–518. doi: [http://dx.doi.org/10.1016/S0922-338X\(97\)86995-4](http://dx.doi.org/10.1016/S0922-338X(97)86995-4)
6. Nishioka, M., Nakai, K., Miyake, M., Asada, Y., Taya, M., Biotechn Letters 23(2001) 1095–1099. doi: <http://dx.doi.org/10.1023/A:1010551614648>
7. Brix H. 1987. Treatment of wastewater in the rhizosphere of wetland plants - the root – zone method. Water Science Technology. vol. 19, s. 107-118. Brix H. 1989. Gas-exchange through dead culms of reed, *Phragmites australis* (Cav.) Trin. ex Steudel., Aquatic Botany 35 (1), 81-98.

8. Brix, H., Schierup, H.H., 1989. Danish experience with sewage treatment in constructed wetlands. In: Hammer, D.A. (Ed.), *Management of Domestic and Municipal Wastewaters*. Lewis Publishers 39a, Michigan, pp. 565–573.
9. Brix H. 1993. Macrophytes - mediated oxygen transfer in wetlands: Transport mechanism and rates. In G. A. Moshiri (Ed.), *Constructed wetlands for water quality improvement*. Ann Arbor, London: Lewis, Chapter 41, 391-398.
10. Drupka S., Sikorski M., Borys K., *Projekty techniczne korzeniowych oczyszczalni ścieków dla gospodarstw indywidualnych w gminie Jastków*. IMUZ – Falenty, 1992.
11. Gajewska, M., Tuszyńska, A., Obarska-Pempkowiak, H., 2004. Influence of configuration of the beds on contaminations removal in hybrid constructed wetlands. *Pol. J. Environ. Stud.* 13, 149–153.
12. Józwiakowski K. 2012. Studies on the efficiency of sewage treatment in chooses constructed wetland systems. *Infrastructure and Ecology of Rural Areas* 1/2012, 232, (in Polish)
13. Józwiakowski K., Pytko A. Marzec M., Gzińska M., Dąbek J. Głaz B. Sławińska A. 2012. Development of water and wastewater infrastructure in Lublin Province in 2000-2011. *Infrastructure and Ecology of Rural Areas*. PAN Oddział w Krakowie. Komisja Technicznej Infrastruktury Wsi, 3/I/2012, 73-86.
14. Józwiakowski, K., Marzec, M., Gizińska-Górna, M., Pytko, A., Skwarzyńska, A., Gajewska, M., Słowik, T., Kowalczyk-Juśko, A., Steszuk, A., Grabowski, T., Szawara, Z., 2014. The concept of construction of hybrid constructed wetland for wastewater treatment in Roztoczański National Park. *Bar. Reg.* 12 (4), 91–102.
15. Józwiakowski, K., Mucha, Z., Generowicz, A., Baran, S., Bielińska, J., Wójcik, W., 2015. The use of multi-criteria analysis for selection of technology for a household WWTP compatible with sustainable development. *Arch. Environ. Prot.* 3, 76–82.
16. Józwiakowski, K., Gajewska, M., Marzec, M., Gizińska-Górna, M., Pytko, A., Kowalczyk- Juśko, A., Sosnowska, B., Baran, S., Malik, A., Kufel, R., 2016. Hybrid constructed wetlands for the National Parks – a case study, requirements, dimensioning, preliminary results. In: Vymazal, J. (Ed.), *Natural and Constructed Wetlands. Nutrients, Heavy Metals and Energy Cycling, and Flow*. Springer International Publishing, Switzerland, pp. 247–265.
17. Józwiakowski K., Marzec M., Kowalczyk-Juśko A., Gizińska-Górna M., Pytko-Woszczyło A., Malik A., Listosz A., Gajewska M. 2019. 25 years of research and experiences about the application of constructed wetlands in southeastern Poland. *Ecological Engineering* 127, 440-453.
18. Kickuth, R. 1969. Höhere Wasserpflanzen und Gewässerreinigung. *Schriftenreihe der Vereinigung Deutscher Gewässerschutz EV-VDG* 19, 3–14.
19. Masi, F., Martinuzzi, N., 2007. Constructed wetlands for the Mediterranean countries: hybrid systems for water reuse and sustainable sanitation. *Desalination* 215, 44–55.
20. Obarska-Pempkowiak H. 2002. *Oczyszczalnie hydrofitowe*. Politechnika Gdańska, 214.
21. Obroślak R., Mazur A., Józwiakowski K., Dorozhynskyy O., Grzywna A., Rybicki R., Nieścioruk K., Król Ż, Gabryszuk J., Gajewska M. 2017. Using terrestrial laser scanning in inventorying of a hybrid constructed wetland system. *Water Science & Technology*, 76(9–10), 2664–2671.


22. Polish Water Law, Dz. U. 2017 poz. 1566, act issued on July 20, 2017 (in Polish).
23. Seidel K. 1965. Neue Wege zur Grundwasseranreicherung in Krefeld, vol. II. Hydrobotanische Reinigungsmethode. GWF Wasser/Abwasser, 831–833.
24. Vymazal, J., 2005. Horizontal sub-surface flow and hybrid constructed wetlands systems for wastewater treatment. Ecol. Eng. 25 (5), 478–490.
25. Vymazal J. Kröpfelová L. 2008. Wastewater treatment in constructed wetlands with horizontal sub-surface flow. Environmental pollution 14, 556.

APPENDIX 1

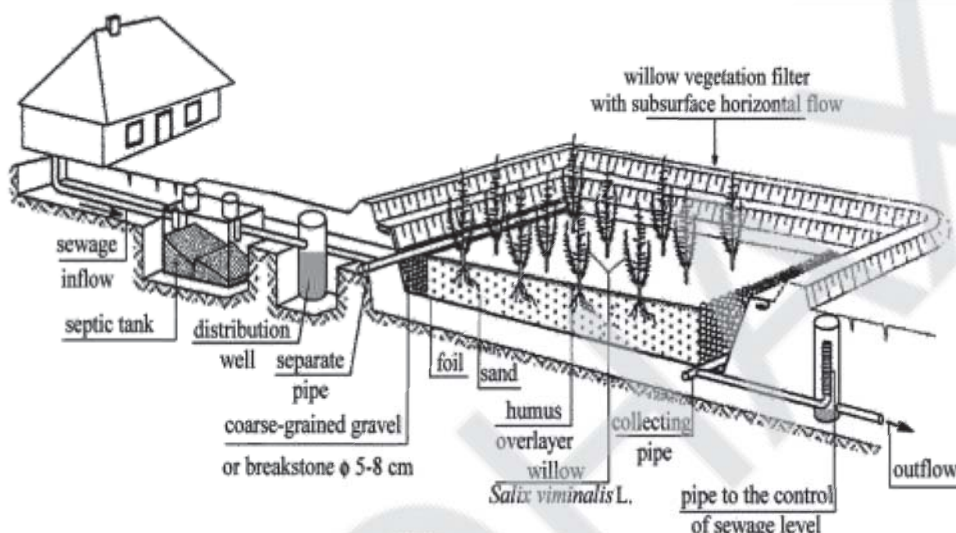

Technological scheme of one stage constructed wetland with subsurface horizontal flow [Drupka et al. 1992]

APPENDIX 2

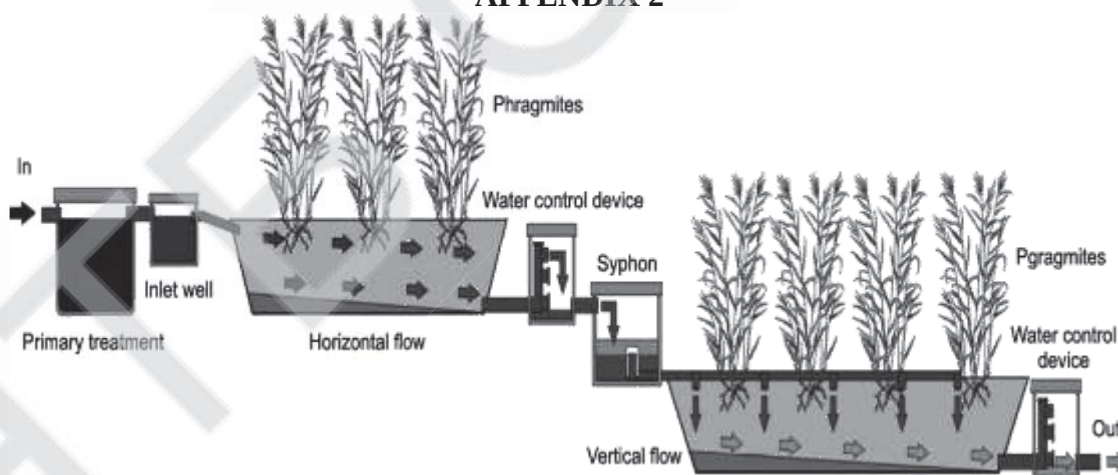

Scheme of hybrid constructed wetlands with HF and VF beds [Masi, Martinuzzi 2007]

APPENDIX 3




[Fot. Józwiakowska K.]



[Józwiakowski K. et al. 2014]

Hybrid constructed wetland in Kosobudy in the Roztocze National Park (VF-HF-HF)

APPENDIX 4

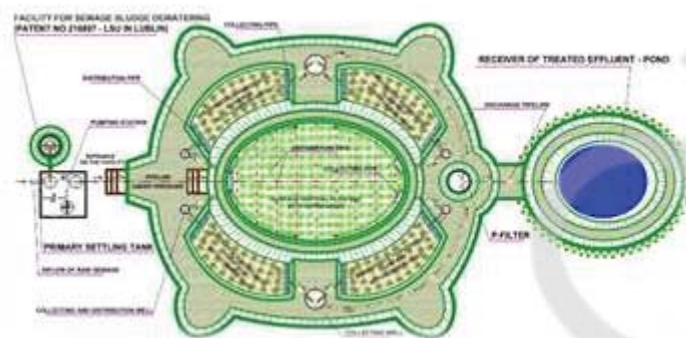

[Obroślak et al. 2017]

Hybrid constructed wetland in Stare Załucze in the Polesie National Park (VF-HF)

APPENDIX 5




Hybrid constructed wetland in Florianka in the Roztocze National Park (VF-HF) [fot. Józwiakowska K.]

APPENDIX 6



Wastewater from the VF-HF system: 1 – raw wastewater, 2 – after mechanical treatment, 5 – outflow from the VF bed, 6 - outflow from the HF bed [Jóźwiakowski 2012]

APPENDIX 7

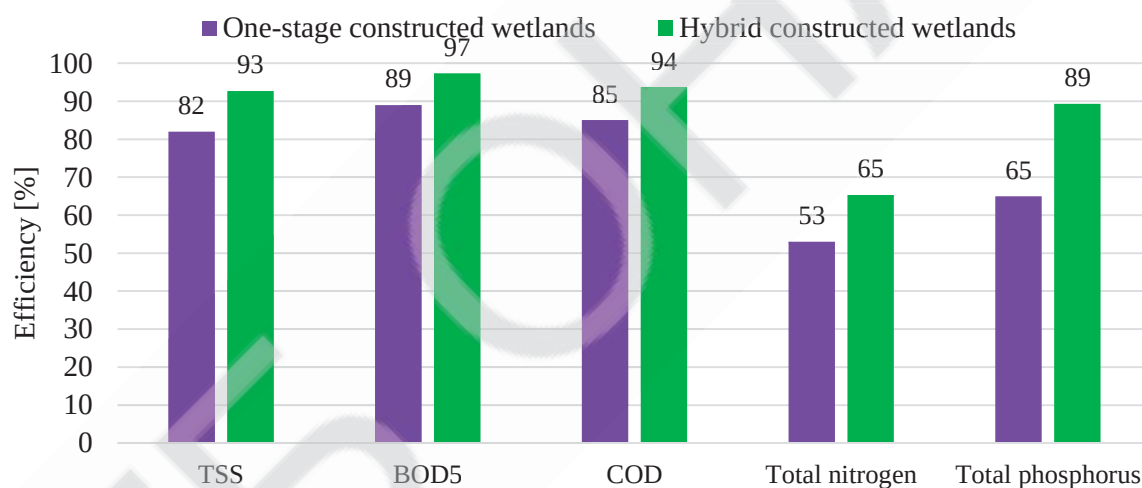

[Jóźwiakowski et al. 2019]

APPENDIX 8




Plants used on constructed wetlands in Poland
[fot. Józwiakowski K.]

APPENDIX 9

Continent	Countries
Europe	Austria, Belgium, Croatia, Czech Republic, Denmark, Estonia, France, Germany, Greece, Ireland, Italy, Lithuania, Netherlands, Norway, Poland , Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland, United Kingdom
North America	Canada, Mexico, USA
South America and Central America	Brazil, Chile, Colombia, Costa Rica, Ecuador, El Salvador, Honduras, Jamaica, Nicaragua, Uruguay
Australia, New Zealand and Oceania	Australia, New Zealand, Fiji
Africa	Egypt, Kenya, Morocco, South Africa, Tanzania, Tunisia, Uganda
Asia	China, India, Israel, Japan, Jordan, Korea, Nepal, Omen, Taiwan, Thailand, Turkey


Application of constructed wetlands in the world [Vymazal 2008]

APPENDIX 10

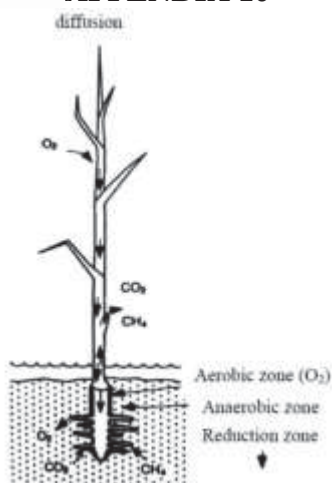

The scheme of the gas-exchange through dead culms of water plants according to Brix [1989]
modified by Obarska-Pempkowiak [2002]

APPENDIX 11

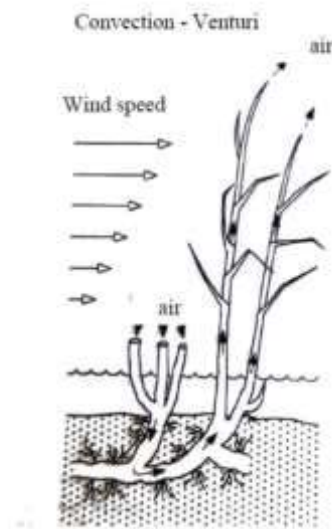


Schematic diagram of air flow through reed tissues in the Venturi convection process according to Brix [1989]

APPENDIX 12



Internal structure of reed stem [fot. Józwiakowski K.]

APPENDIX 13

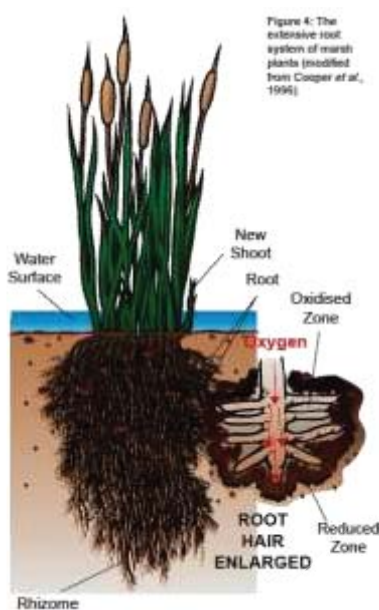


The extensive root system of marsh plants (modified from Cooper et al. 1996)

APPENDIX 14

No of suspension sample	Mass content of additives, ppm		
	PAX-18	PAX-XL19H	A100
1	—	—	—
2	10	—	—
3	1	—	—
4	—	10	—
5	—	1	—
6	—	—	10
7	—	—	1
8	10	—	—
9	—	10	1

Content of additives in the study of *Microcystis aeruginosa* aqueous suspensions thickening by sedimentation with coagulation-flocculation pretreatment

APPENDIX 15

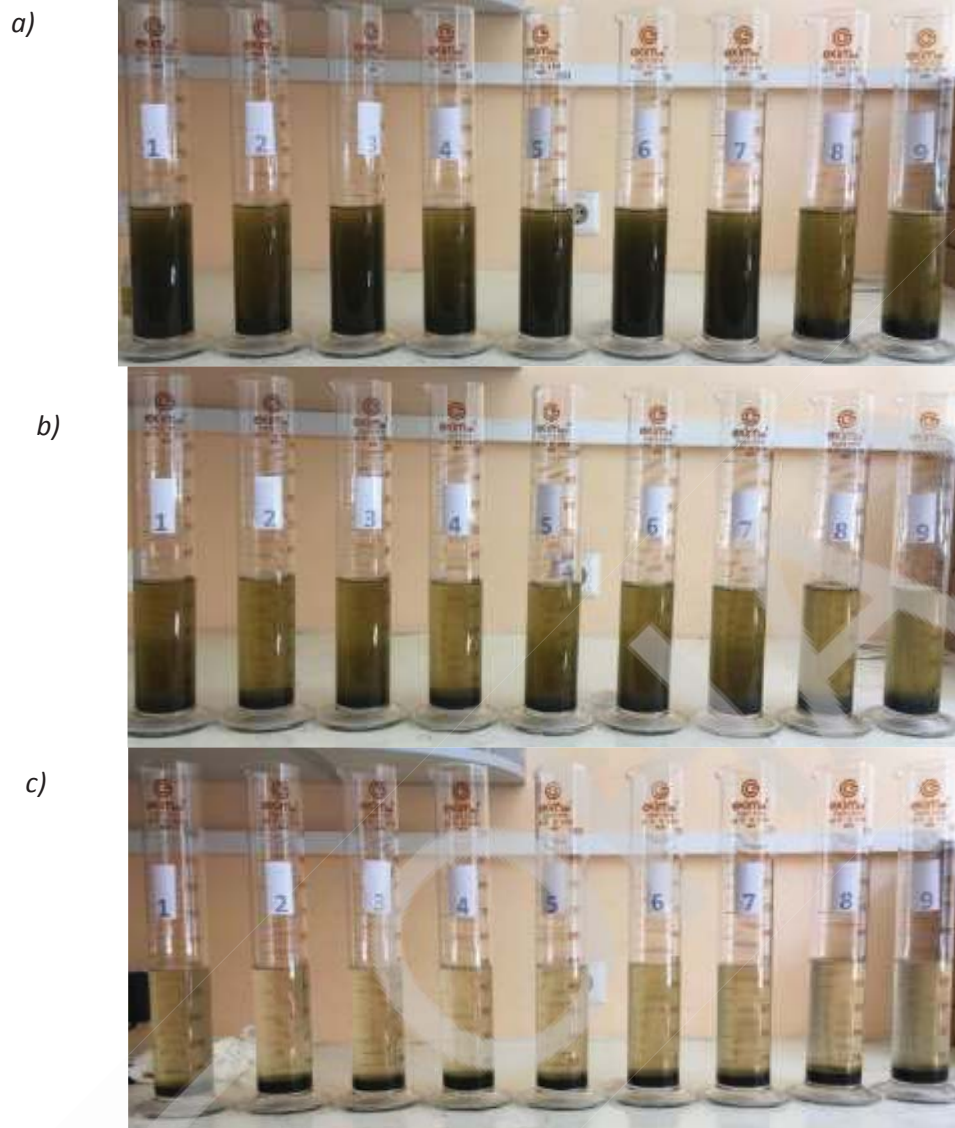


Kinetics of sedimentation of *Microcystis aeruginosa* suspensions in lab-scale conditions: a – after 5 min; b – after 30 min; c – after 24 hours

APPENDIX 16




Scheme of experimental plant for infiltrate aerobic purification

APPENDIX 17

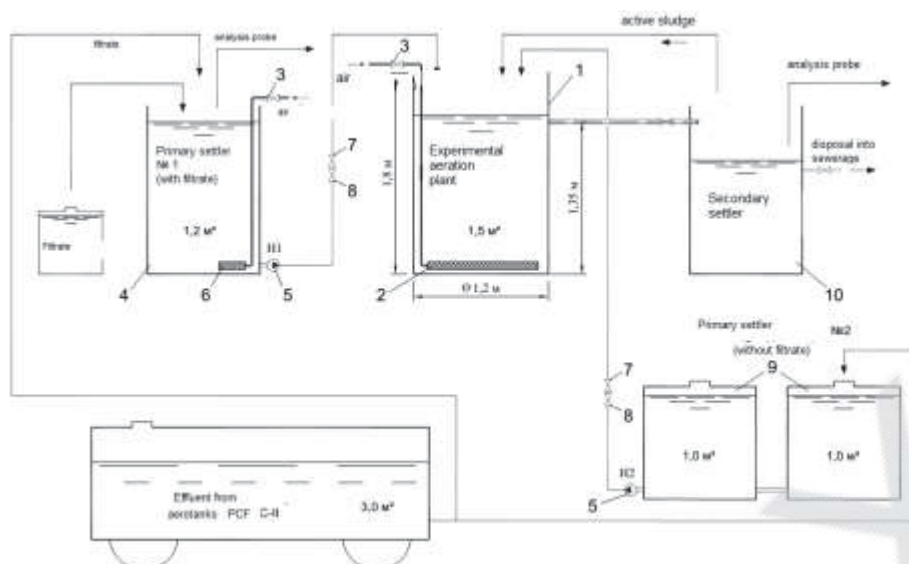


Experimental plant for tertiary infiltrate treatment

APPENDIX 18

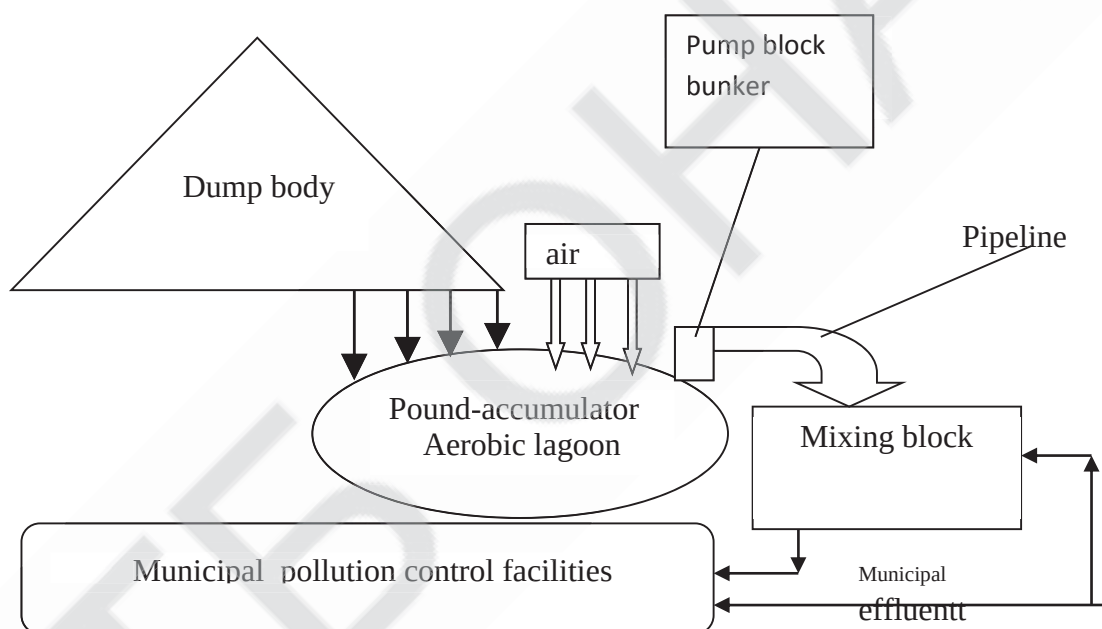

Principal scheme of two-stage landfill infiltrate purification in aerobic lagoons and at municipal pollution control facilities


APPENDIX 19

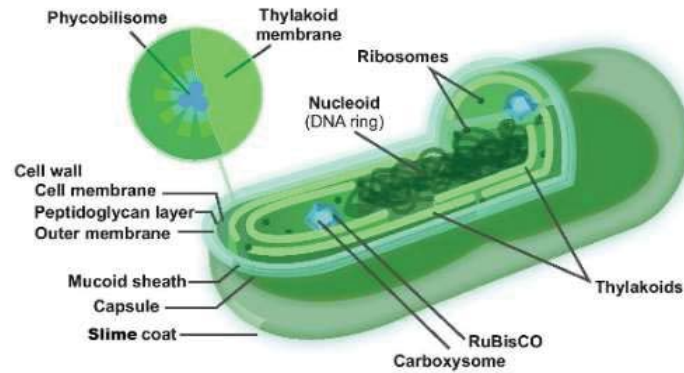

Structural and functional organization of cyanobacteria cell


APPENDIX 20

Conceptual model of impact factors on development of cyanobacteria (after Paerl et al. 2011)

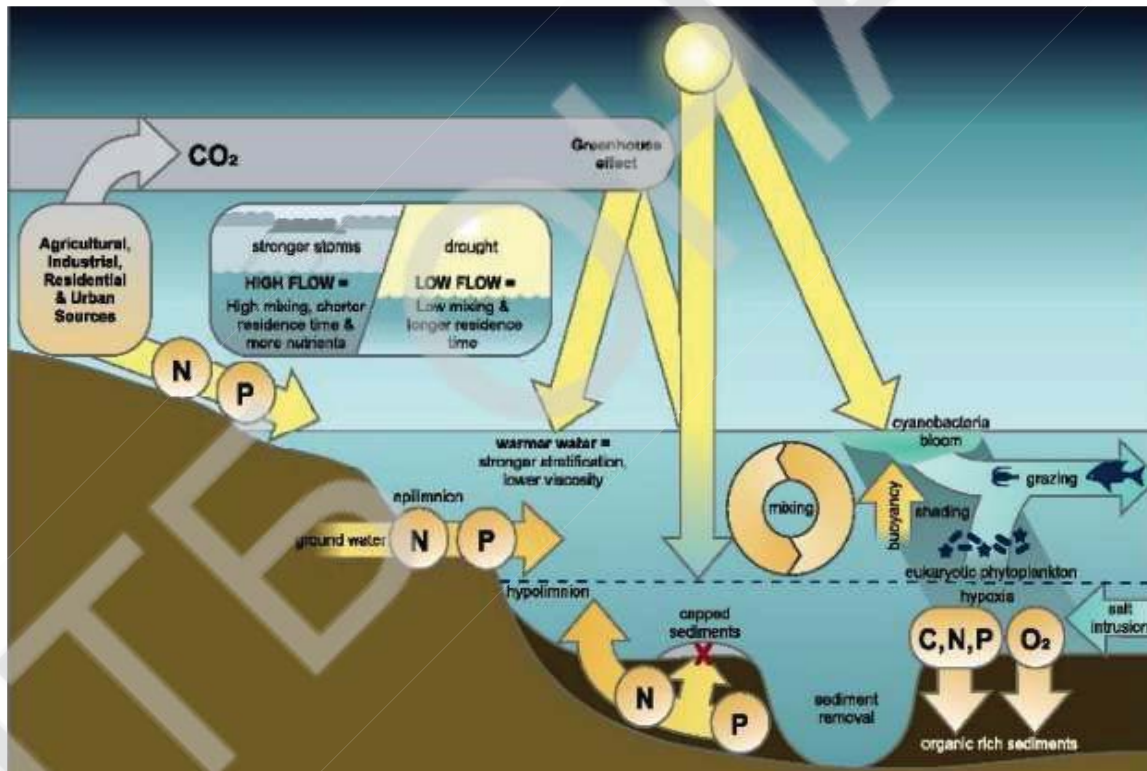

Possible applications of target products from algae

APPENDIX 21

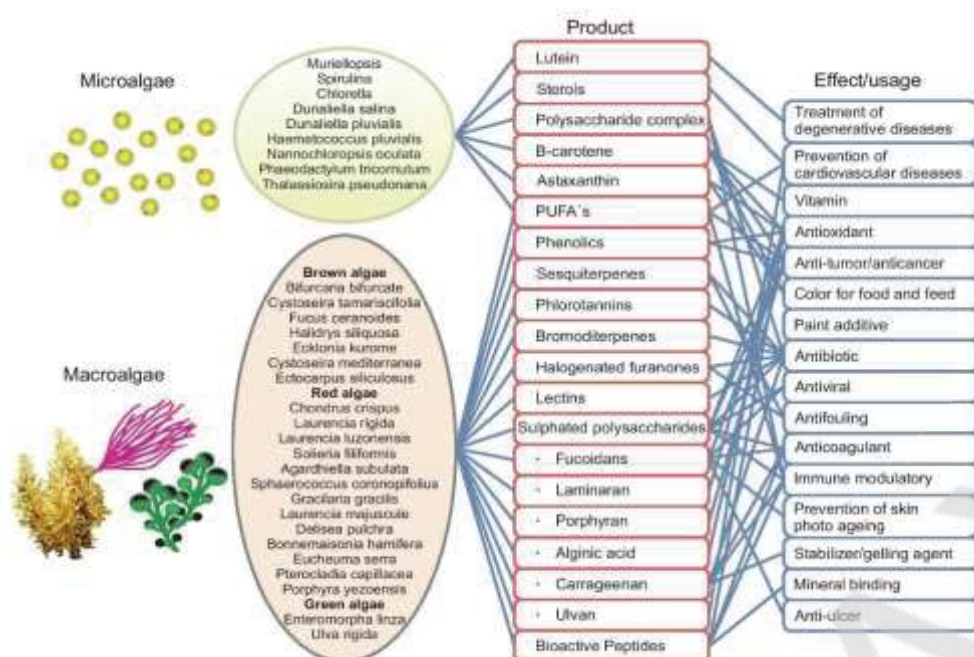

A RESULT-ORIENTED FRAMEWORK TO SUPPORT THE LOW-CARBON TRANSFORMATION OF ENERGY SERVICES MARKET	
Author: Maria Yevtukhova	
Advisors: Valeriy Deshko	
Oleksandr Kovalko	
National Technical University “KPI” (Ukraine).....	555
COMBINED SMALL-SCALE POWER INSTALLATION FOR GENERATION OF THE HEAT, ELECTRICITY, AND MOISTURE FROM AIR	
Author: Zhang Haobo	
Advisor: Volovyk Oleksii	
NingboTech University (China).....	569
INVESTIGATION OF THE INFLUENCE OF THERMAL MODERNIZATION OF PANEL RESIDENTIAL BUILDINGS IN POLTAVA ON THE HUMIDITY CONDITION OF PANELS IN THE JOINT ZONE	
Authors: Vitalii Kidenko, Mustafa Omer Mussab Musaad, Pavlo Havrylenko	
Advisors: Oleg Yurin, Nataliia Mahas	
National University «Yuri Kondratyuk Poltava Polytechnic» (Ukraine).....	579
HEAT AND MASS TRANSFER IN BIOMASS PYROLYSIS TECHNOLOGIES	
Authors: Gustaw Kot, Agnieszka Jardel	
Advisor: prof. Anatoliy Pavlenko	
Kielce University of Technology (Poland).....	592
INCREASING THE EFFICIENCY OF AN AUTONOMOUS POWER SUPPLY SYSTEM BASED ON PHOTOELECTRIC CONVERTERS	
Author: Kateryna Novyk	
Advisor: Serhii Stepenko	
Chernihiv Polytechnic National University (Ukraine).....	598
INCREASING THE LEVEL OF ENERGY EFFICIENCY OF COMBINED POWER SUPPLY SYSTEMS	
Author: Andrew Yakovenko, Maxim Slavov	
Advisor: Serhii Dudnikov	
Petro Vasylenko Kharkiv National Technical University of Agriculture (Ukraine)	615
5. ECOLOGY AND ENVIRONMENTAL PROTECTION.....	628
EFFICIENCY FROM WETLANDS AND AERATED LAGOONS FOR WASTEWATER TREATMENT	
Authors: Anastasia Lahotska ¹ , Karolina Jozwiakowska ²	
Advisor: Myroslav Malovanyy	
¹ Lviv Polytechnic National University (Ukraine)	
² H. Kołłątaj University of Agriculture in Kraków (Poland).....	629